




Zawór przeponowy ZPB-P DN 25÷150

żeliwny-kolnierzowy z napędem pneumatycznym nr kat.: 1691-0.2/2011

Flanged cast-iron diaphragm valve ZPA 25÷150 with pneumatic actuator Cat. No. 1691-0.2/2011

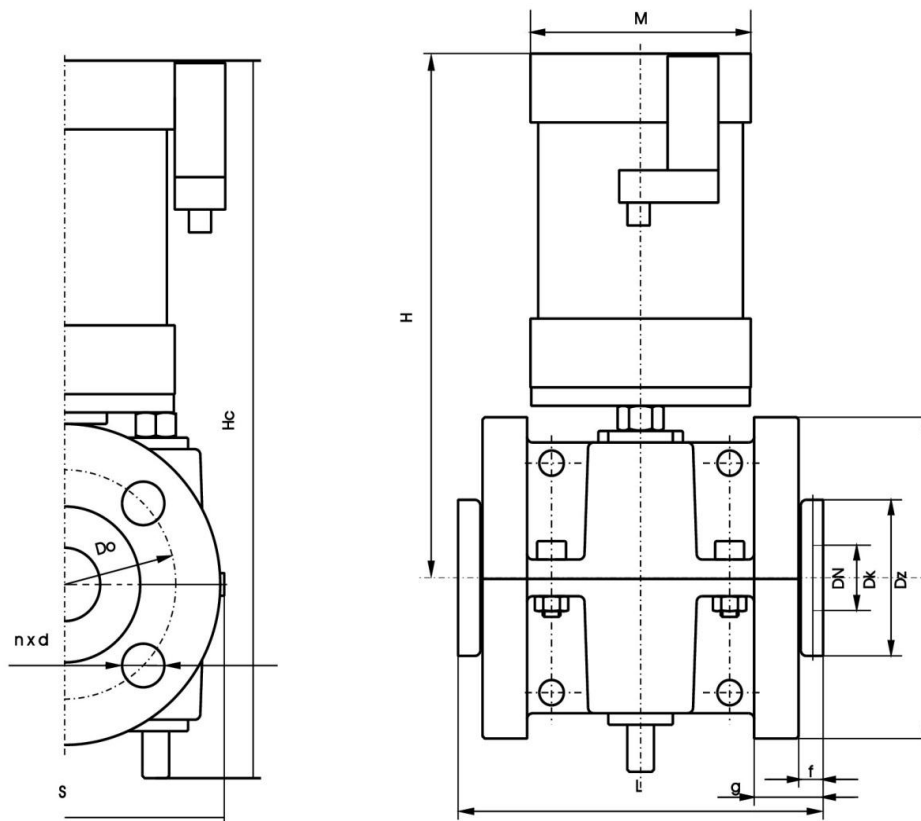

DN	Pn [MPa]	Wymiary gabarytowe Overall dimensions							Wymiary przyłączeniowe Connection dimensions			Masa Weight [kg]
		L	Hc	S	H	g	f	M	Dk	Dz	n x d x D ₀	
25	1,6	108	399	160	317	-	12	95	59	115	4 x M16 x 85	10,5
32		164	404	140	320	31	11	95	68	140	4 x 19 x 100	15
40		165	407	200	362	30	10	115	84	150	4 x 19 x 110	21
50		165	494	200	377	30,5	10	115	99	165	4 x 19 x 125	22
65	1,0	165	540	224	405	30,5	10	140	118	185	4 x 19 x 145	29
80		200	654	260	504	34,5	12	180	132	200	8 x 19 x 160	46
100		250	671	290	501	36,5	12	220	152	220	8 x 19 x 180	65
125		310	1004	350	793	41	15	220	184	250	8 x 19 x 210	92
150		375	1126	390	886	44	16	220	211	285	8 x 13 x 240	101

Wymiary przyłączeniowe zaworów zgodne z PN-EN 1092-2
 Connection dimensions of the valves in accordance with PN-EN 1092-2